


GIP QUADRO W PLEXI



NULAMP



NULAMP

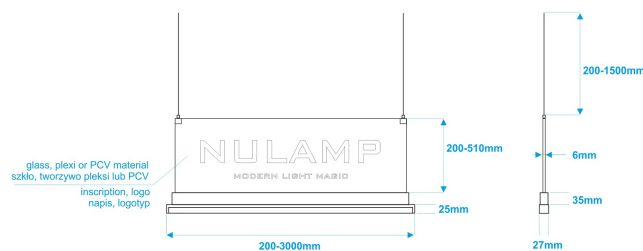

Hanging lamp, which is a **combination of two lamps**: a lamp **shining down with a square cover** and a lamp **shining up - illuminating optionally engraved plexiglas plate**.

An advertising LED lamp can be widely used: simultaneous lighting and marking of workplace, advertising lighting, informative lighting. It is possible to highlight the top information-advertising part with RGB tape in any chosen colour.

Exemplary implemented projects for banks – workplace marking “CASHIER”, “CUSTOMER SERVICE” SAVINGS ” etc.

- Lamp: **double anodized aluminium** – grey, can be painted in any colour from the NCS scale.
- Optional transparent blend (glass efficiency 95%), or opal glass (glass transparency 70%): Makrolon®, of Bayer Polymers, **full certification**.
- Highest quality LED **OSRAM DURIS** E5 diodes.
- Control: **Dali, 1-10V, KNX, Fibaro**.
- Luminaires design enables **easy maintenance and replacement of light sources**.
- Lamps with a light source were produced in the **European Union**.
- Possibility to **modify a set of lamps for specific customer expectations** (size, colour housing, light colour, type of light source: RGB, RGBW, active white) – [UDESIGN custom](#).
- Standard length of cables – each 20-150 cm, adjustable to any length.

3 Year warranty	Length [cm]	Power [W]	Luminous flux [lm]	Colour temperature [K]	CRI [Ra]
GIPQUADROWPLEXI 100-22-___	100	22	2100 / 2350 / 2400	3000 / 4000 / 5000	>80
GIPQUADROWPLEXI 150-33-___	150	33	3150 / 3525 / 3600	3000 / 4000 / 5000	>80
GIPQUADROWPLEXI 200-44-___	200	44	4200 / 4700 / 4800	3000 / 4000 / 5000	>80
GIPQUADROWPLEXI 300-66-___	300	66	6300 / 7050 / 7200	3000 / 4000 / 5000	>80
5 Year warranty	Length [cm]	Power [W]	Luminous flux [lm]	Colour temperature [K]	CRI [Ra]
GIPQUADROWPLEXI 100-13-___	100	13	1240 / 1390 / 1420	3000 / 4000 / 5000	>80
GIPQUADROWPLEXI 150-19.5-___	150	19,5	1860 / 2085 / 2130	3000 / 4000 / 5000	>80
GIPQUADROWPLEXI 200-26-___	200	26	2480 / 2780 / 2840	3000 / 4000 / 5000	>80
GIPQUADROWPLEXI 300-39-___	300	39	3720 / 4170 / 4260	3000 / 4000 / 5000	>80

LAMP NAME- 100 - 13 -3000- M -DALI

1 2 3 4 5

1. Length [cm] 50, 100, 150, 200, 300 cm special order - 10-300 cm	2. Power [W] 13 W/m 22 W/m special order - others	3. Colour temperature [K] 3000 K - warm 4000 K - neutral 5000 K - cold special order - 2700K, 6000K	4. Cover T - transparent M - milk/frosted	5. Control Fibaro 1-10 V Dali KNX
---	---	--	--	--