

GIP RUNDO W + BOX



- CE
- RoHS
- 24VDC
- IP20
- A+
- III
- Home icon
- RAL

NULAMP



NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP



NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP

NULAMP

NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP



NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP

NULAMP





NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP

NULAMP



NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP

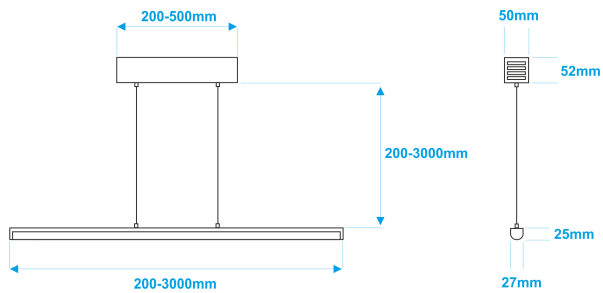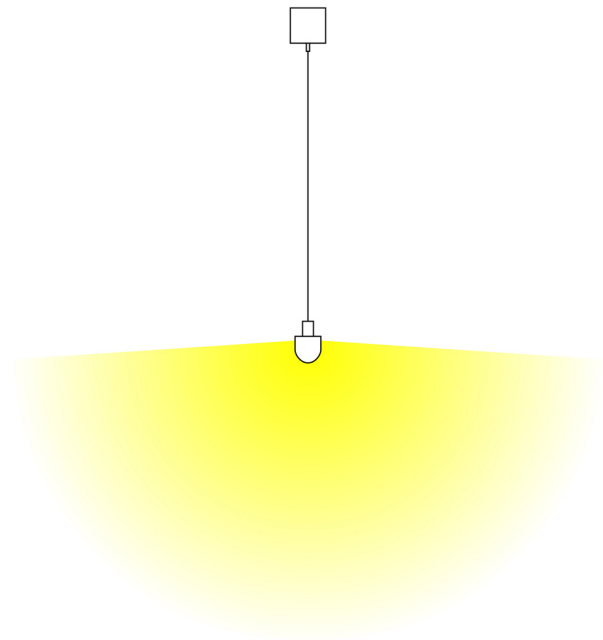

Modern, hanging LED utility lamp, emitting soft and diffused light with no visible light spots. Elegant and slender RUNDO may be used as modern lighting for home, office or garage. It is available with box designed for power supply and wiring.

- Lamp: **double anodized aluminium** - grey, can be painted in any colour from the NCS scale.
- Optional transparent blend (glass efficiency 95%), or opal glass (glass transparency 70%): Makrolon®, of Bayer Polymers, **full certification**.
- Highest quality LED **OSRAM DURIS E5** diodes.
- Control: **Dali, 1-10V, KNX, Fibaro**.

- Luminaires design enables **easy maintenance and replacement of light sources**.
- Lamps with a light source were produced in the **European Union**.
- Possibility to **modify a set of lamps for specific customer expectations** (size, colour housing, light colour, type of light source: RGB, RGBW, active white) - [UDESIGN custom](#).
- Standard length of cables - each 20-300 cm, adjustable to any length.

3 Year warranty	Length [cm]	Power [W]	Luminous flux [lm]	Colour temperature [K]	CRI [Ra]
GIPRUNDOW+BOX 100-22-___	100	22	2100 / 2350 / 2400	3000 / 4000 / 5000	>80
GIPRUNDOW+BOX 150-33-___	150	33	3150 / 3525 / 3600	3000 / 4000 / 5000	>80
GIPRUNDOW+BOX 200-44-___	200	44	4200 / 4700 / 4800	3000 / 4000 / 5000	>80
GIPRUNDOW+BOX 300-66-___	300	66	6300 / 7050 / 7200	3000 / 4000 / 5000	>80
5 Year warranty	Length [cm]	Power [W]	Luminous flux [lm]	Colour temperature [K]	CRI [Ra]
GIPRUNDOW+BOX 100-13-___	100	13	1240 / 1390 / 1420	3000 / 4000 / 5000	>80
GIPRUNDOW+BOX 150-19.5-___	150	19,5	1860 / 2085 / 2130	3000 / 4000 / 5000	>80
GIPRUNDOW+BOX 200-26-___	200	26	2480 / 2780 / 2840	3000 / 4000 / 5000	>80
GIPRUNDOW+BOX 300-39-___	300	39	3720 / 4170 / 4260	3000 / 4000 / 5000	>80

LAMP NAME- 100 - 13 -3000- M -DALI

1 2 3 4 5

1. Length [cm]	2. Power [W]	3. Colour temperature [K]	4. Cover	5. Control
50, 100, 150, 200, 300 cm special order - 10-300 cm	13 W/m 22 W/m special order - others	3000 K - warm 4000 K - neutral 5000 K - cold special order - 2700K, 6000K	T - transparent M - milk/frosted	Fibaro 1-10 V Dali KNX