

# IMET K




**NULAMP**



NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP

NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP

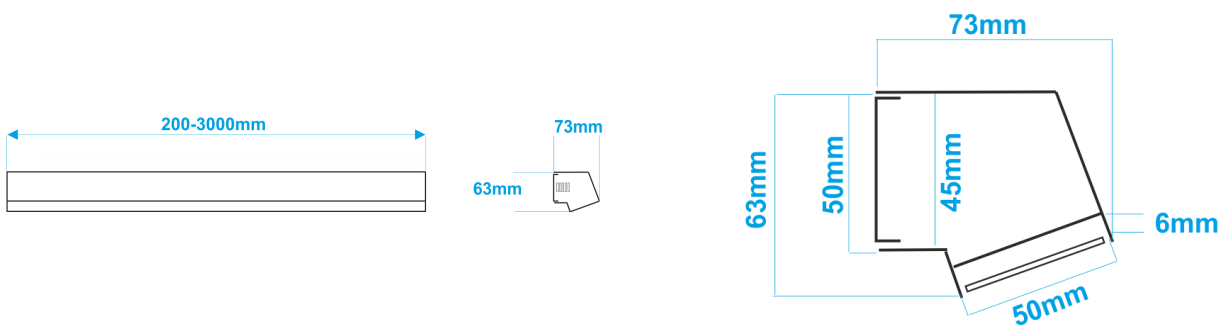

IMET - LED wall lamp with a light source pointing down at the angle. Energy-efficient linear LED lighting with two or more parallel light lines, designed for easy attachment to a ground. Lamp construction enables easy surface mounting, the lamp consisting of two parts: U (main part, with LED rails and electronic gear) and Z (part attached to the ground), connect by „click“.

A specially designed HSP47 cover (opal glass or transparent) made of polycarbonate, has a certificate that guarantees excellent resistance to atmospheric factors, UV radiation and flammability.

LED lamp enables to conceal power supply and wiring. Lamps of different lengths are available. Lamps to order with a wide range of applications, including use as decorative LED lighting for offices, passageways.

- Lamp: **double anodized aluminium** - grey, can be painted in any colour from the NCS scale.
- Optional transparent blend (glass efficiency 95%), or opal glass (glass transparency 70%): Makrolon®, of Bayer Polymers, **full**

**certification.**

- Highest quality LED **OSRAM DURIS** E5 diodes.
- Control: **Dali, 1-10V, KNX, Fibaro.**
- Luminaires design enables **easy maintenance and replacement of light sources.**
- Lamps with a light source were produced in the **European Union.**
- Possibility to **modify a set of lamps for specific customer expectations** (size, colour housing, light colour, type of light source: RGB, RGBW, active white) - [UDESIGN custom.](#)

<b>3 Year warranty</b>	<b>Length [cm]</b>	<b>Power [W]</b>	<b>Luminous flux [lm]</b>	<b>Colour temperature [K]</b>	<b>CRI [Ra]</b>
IMETK 30-11-___	<b>30</b>	11	1050 / 1175 / 1200	3000 / 4000 / 5000	>80
IMETK 50-22-___	<b>50</b>	22	2100 / 2350 / 2400	3000 / 4000 / 5000	>80
IMETK 100-44-___	<b>100</b>	44	4200 / 4700 / 4800	3000 / 4000 / 5000	>80
IMETK 150-66-___	<b>150</b>	66	6300 / 7050 / 7200	3000 / 4000 / 5000	>80
IMETK 200-88-___	<b>200</b>	88	8400 / 9400 / 9600	3000 / 4000 / 5000	>80
<b>5 Year warranty</b>	<b>Length [cm]</b>	<b>Power [W]</b>	<b>Luminous flux [lm]</b>	<b>Colour temperature [K]</b>	<b>CRI [Ra]</b>
IMETK 30-6.5-___	<b>30</b>	6,5	620 / 695 / 710	3000 / 4000 / 5000	>80
IMETK 50-13-___	<b>50</b>	13	1240 / 1390 / 1420	3000 / 4000 / 5000	>80
IMETK 100-26-___	<b>100</b>	26	2480 / 2780 / 2840	3000 / 4000 / 5000	>80
IMETK 150-39-___	<b>150</b>	39	3720 / 4170 / 4260	3000 / 4000 / 5000	>80
IMETK 200-52-___	<b>200</b>	52	4960 / 5560 / 5680	3000 / 4000 / 5000	>80
IMETK 300-78-___	<b>300</b>	78	7440 / 8340 / 8520	3000 / 4000 / 5000	>80

LAMP NAME- 100 - 13 - 3000- M - DALI

1                      2                      3                      4                      5

<b>1. Length [cm]</b> 50, 100, 150, 200, 300 cm special order - 10-300 cm	<b>2. Power [W]</b> 13 W/m 22 W/m special order - others	<b>3. Colour temperature [K]</b> 3000 K - warm 4000 K - neutral 5000 K - cold special order - 2700K, 6000K	<b>4. Cover</b> T - transparent M - milk/frosted	<b>5. Control</b> Fibaro 1-10 V Dali KNX
---	---	--	--	--