



LIPOD P + BOX

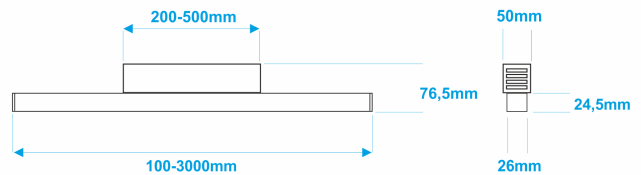

NULAMP



Surface-mounted architectural LED lamp with the power supply box. Energy-efficient linear LED lighting, in the form of a double plafond, designed for surface mounting. Lamp construction enables easy connection to the surface of the box, where you can hide the power supply. It is possible to obtain a uniform light line and to purchase lamps of different lengths. Lamps to order with a wide range of applications, including use as office lighting or home lamps.

- Lamp: **double anodized aluminium** - grey, can be painted in any colour from the NCS scale.
- Optional transparent blend (glass efficiency 95%), or opal glass (glass transparency 70%): Makrolon®, of Bayer Polymers, **full certification**.
- Highest quality LED **OSRAM DURIS E5** diodes.
- Control: **Dali, 1-10V, KNX, Fibaro**.
- Luminaires design enables **easy maintenance and replacement of light sources**.
- Lamps with a light source were produced in the **European Union**.
- Possibility to **modify a set of lamps for specific customer expectations** (size, colour housing, light colour, type of light source: RGB, RGBW, active white) - [JDESIGN custom](#).

3 Year warranty	Length [cm]	Power [W]	Luminous flux [lm]	Colour temperature [K]	CRI [Ra]
LIPODP+BOX 50-11-___	50	11	1050 / 1175 / 1200	3000 / 4000 / 5000	>80
LIPODP+BOX 100-22-___	100	22	2100 / 2350 / 2400	3000 / 4000 / 5000	>80
LIPODP+BOX 150-33-___	150	33	3150 / 3525 / 3600	3000 / 4000 / 5000	>80
LIPODP+BOX 200-44-___	200	44	4200 / 4700 / 4800	3000 / 4000 / 5000	>80

LIPODP+BOX 300-66-___	300	66	6300 / 7050 / 7200	3000 / 4000 / 5000	>80
5 Year warranty	Length [cm]	Power [W]	Luminous flux [lm]	Colour temperature [K]	CRI [Ra]
LIPODP+BOX 50-6.5-___	50	6,5	620 / 695 / 710	3000 / 4000 / 5000	>80
LIPODP+BOX 100-13-___	100	13	1240 / 1390 / 1420	3000 / 4000 / 5000	>80
LIPODP+BOX 150-19.5-___	150	19,5	1860 / 2085 / 2130	3000 / 4000 / 5000	>80
LIPODP+BOX 200-26-___	200	26	2480 / 2780 / 2840	3000 / 4000 / 5000	>80
LIPODP+BOX 300-39-___	300	39	3720 / 4170 / 4260	3000 / 4000 / 5000	>80

LAMP NAME- 100 - 13 -3000- M -DALI

1

2

3

4

5

1. Length [cm]	2. Power [W]	3. Colour temperature [K]	4. Cover	5. Control
50, 100, 150, 200, 300 cm special order - 10-300 cm	13 W/m 22 W/m special order - others	3000 K - warm 4000 K - neutral 5000 K - cold special order - 2700K, 6000K	T - transparent M - milk/frosted	Fibaro 1-10 V Dali KNX