



REGULOR P + BOX

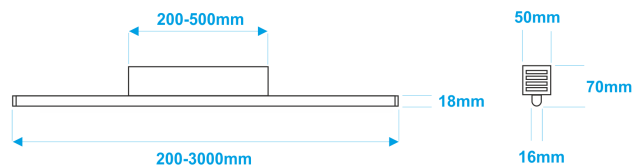

NULAMP

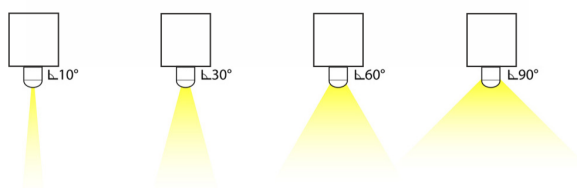

REGULOR P + BOX is a **surface mounted linear LED lamp**, enabling emission of a narrow line of light even from a distance of a few meters. This model allows the selection of the lighting angle: 10°, 30°, 60°, or 90°. It perfectly focuses light, without irritating eyes. Lamp construction enables easy surface mounting by box, designed for power supply and wiring.

- Lamp: **double anodized aluminium** - grey, can be painted in any colour from the NCS scale.
- Optional transparent blend (glass efficiency 95%), or opal glass (glass transparency 70%): Makrolon®, of Bayer Polymers, **full certification**.
- Highest quality LED **OSRAM DURIS E5** diodes.
- Control: **Dali, 1-10V, KNX, Fibaro**.
- Luminaires design enables **easy maintenance and replacement of light sources**.
- Lamps with a light source were produced in the **European Union**.
- Possibility to **modify a set of lamps for specific customer expectations** (size, colour housing, light colour, type of light source: RGB, RGBW, active white) - [UDESIGN custom](#).

3 Year warranty	Length [cm]	Power [W]	Luminous flux [lm]	Colour temperature [K]	CRI [Ra]
REGULORP+BOX 50-11-___	50	11	1050 / 1175 / 1200	3000 / 4000 / 5000	>80
REGULORP+BOX 100-22-___	100	22	2100 / 2350 / 2400	3000 / 4000 / 5000	>80
REGULORP+BOX 150-33-___	150	33	3150 / 3525 / 3600	3000 / 4000 / 5000	>80

REGULORP+BOX 200-44-___	200	44	4200 / 4700 / 4800	3000 / 4000 / 5000	>80
REGULORP+BOX 300-66-___	300	66	6300 / 7050 / 7200	3000 / 4000 / 5000	>80
5 Year warranty	Length [cm]	Power [W]	Luminous flux [lm]	Colour temperature [K]	CRI [Ra]
REGULORP+BOX 50-6.5-___	50	6,5	620 / 695 / 710	3000 / 4000 / 5000	>80
REGULORP+BOX 100-13-___	100	13	1240 / 1390 / 1420	3000 / 4000 / 5000	>80
REGULORP+BOX 150-19.5-___	150	19,5	1860 / 2085 / 2130	3000 / 4000 / 5000	>80
REGULORP+BOX 200-26-___	200	26	2480 / 2780 / 2840	3000 / 4000 / 5000	>80
REGULORP+BOX 300-39-___	300	39	3720 / 4170 / 4260	3000 / 4000 / 5000	>80

LAMP NAME- 100 - 13 -3000- M -DALI

1

2

3

4

5

1. Length [cm]

50, 100, 150, 200, 300 cm
special order - 10-300 cm

2. Power [W]

13 W/m
22 W/m
special order - others

3. Colour temperature [K]

3000 K - warm
4000 K - neutral
5000 K - cold
special order - 2700K, 6000K

4. Cover

T - transparent
M - milk/frosted

5. Control

Fibaro
1-10 V
Dali
KNX