

# REGULOR W + BOX



**NULAMP**

NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP



NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP

NULAMP





NULAMP



NULAMP



NULAMP

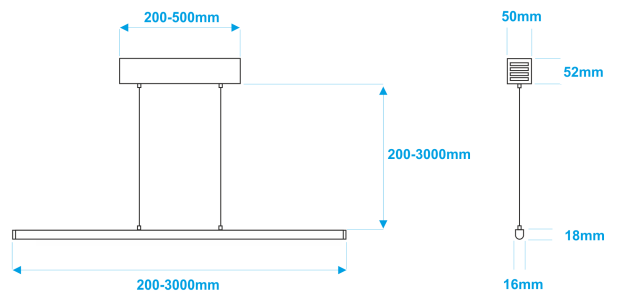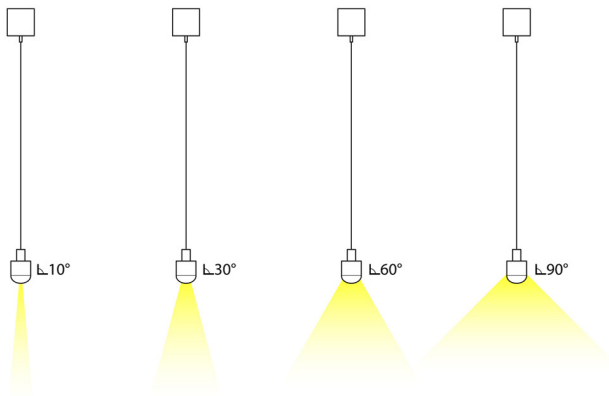

Minimalist, sleek hanging LED lamp with power supply box. A lamp with a narrow angle of the emitted light - optional: 10, 30, 60 or 90 degrees, ideal for high ceilings. It enables emission of a narrow line of light even from a distance of a few meters. Hung over the table perfectly focuses light and is not irritating to eyes.

It can be used as a modern lighting for office, home or other functional interior. Energy-efficient linear LED lighting, designed for ceiling mounting with rails and box, where the power source can be hidden. There is a possibility of purchasing lamps of different lengths. Used as office lighting and home lamps.

- Lamp: **double anodized aluminium** - grey, can be painted in any colour from the NCS scale.
- Optional transparent blend (glass efficiency 95%), or opal glass (glass transparency 70%): Makrolon®, of Bayer Polymers, **full certification**.
- Highest quality LED **OSRAM DURIS E5** diodes.
- Control: **Dali, 1-10V, KNX, Fibaro**.

- Luminaires design enables **easy maintenance and replacement of light sources**.
- Lamps with a light source were produced in the **European Union**.
- Possibility to **modify a set of lamps for specific customer expectations** (size, colour housing, light colour, type of light source: RGB, RGBW, active white) - [UDESIGN custom](#).
- Standard length of cables - each 20-300 cm, adjustable to any length.

3 Year warranty	Length [cm]	Power [W]	Luminous flux [lm]	Colour temperature [K]	CRI [Ra]
REGULORW+BOX 100-22-___	<b>100</b>	22	2100 / 2350 / 2400	3000 / 4000 / 5000	>80
REGULORW+BOX 150-33-___	<b>150</b>	33	3150 / 3525 / 3600	3000 / 4000 / 5000	>80
REGULORW+BOX 200-44-___	<b>200</b>	44	4200 / 4700 / 4800	3000 / 4000 / 5000	>80
REGULORW+BOX 300-66-___	<b>300</b>	66	6300 / 7050 / 7200	3000 / 4000 / 5000	>80
5 Year warranty	Length [cm]	Power [W]	Luminous flux [lm]	Colour temperature [K]	CRI [Ra]
REGULORW+BOX 100-13-___	<b>100</b>	13	1240 / 1390 / 1420	3000 / 4000 / 5000	>80
REGULORW+BOX 150-19.5-___	<b>150</b>	19,5	1860 / 2085 / 2130	3000 / 4000 / 5000	>80
REGULORW+BOX 200-26-___	<b>200</b>	26	2480 / 2780 / 2840	3000 / 4000 / 5000	>80
REGULORW+BOX 300-39-___	<b>300</b>	39	3720 / 4170 / 4260	3000 / 4000 / 5000	>80

LAMP NAME- 100 - 13 -3000- M -DALI

1

2

3

4

5

1. Length [cm]

50, 100, 150, 200, 300 cm  
special order - 10-300 cm

2. Power [W]

13 W/m  
22 W/m  
special order - others

3. Colour temperature [K]

3000 K - warm  
4000 K - neutral  
5000 K - cold  
special order - 2700K, 6000K

4. Cover

T - transparent  
M - milk/frosted

5. Control

Fibaro  
1-10 V  
Dali  
KNX