

# SEPOD W



- CE
- RoHS
- 24VDC
- IP20
- A+
- III
- House icon
- RAL


**NULAMP**





**NULAMP**



Safe and strong attachment  
Pewne i mocne zamocowanie

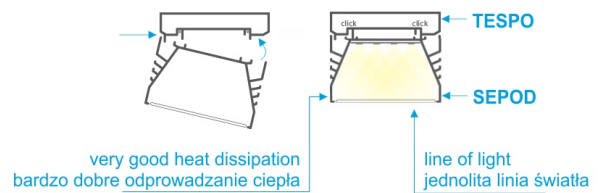

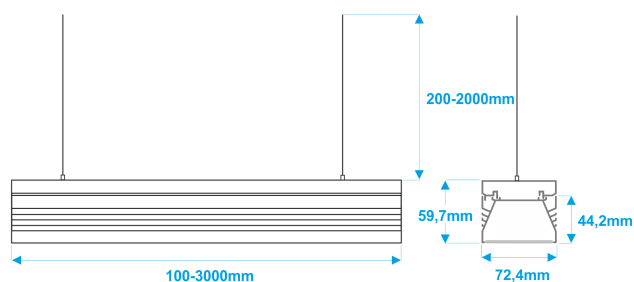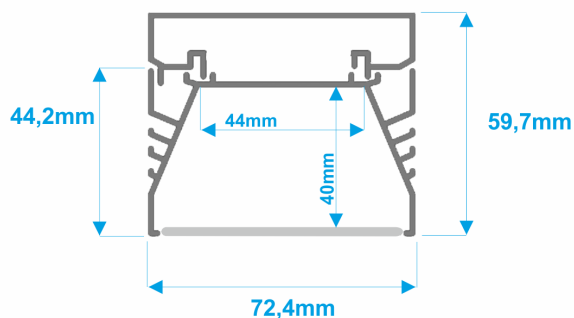

**Hanging high power LED lamp.** Energy-efficient linear LED lighting, with mounted three or more parallel light lines, designed for easy mounting with special rails, mounted to TESPO part. A specially designed SZER cover (opal glass or frosted) made of polycarbonate, has a certificate that guarantees excellent resistance to atmospheric factors, UV radiation and flammability. Lamps of different lengths and wide range of application possibilities are available. **SEPODW** is a utility lamp that can be used as industrial lighting, large office luminaire (100cm or more) and modern LED lighting for home and functional interiors (50cm).

- Hanging lamp: **double anodized aluminium** - grey, can be painted in any colour from the NCS scale.
- Optional cover: frosted (glass efficiency 83%), or transparent (glass efficiency 95%): Makrolon®, of Bayer Polymers, **full certification**.
- Highest quality LED **OSRAM DURIS** E5 diodes.
- Control: **Dali, 1-10V, KNX, Fibaro**.
- Luminaires design enables **easy maintenance and replacement of light sources**.
- Lamps with a light source were produced in the **European Union**.
- Possibility to **modify a set of lamps for specific customer expectations** (size, colour housing, light colour, type of light source: RGB, RGBW, active white) - [JDESIGN custom](#).
- Standard length of rods - each 20-200 cm, adjustable to any length.

<b>3 Year warranty</b>	<b>Length [cm]</b>	<b>Power [W]</b>	<b>Luminous flux [lm]</b>	<b>Colour temperature [K]</b>	<b>CRI [Ra]</b>
SEPODW 100-66-___	<b>100</b>	66	6300 / 7050 / 7200	3000 / 4000 / 5000	>80
SEPODW 150-99-___	<b>150</b>	99	9450 / 10575 / 10800	3000 / 4000 / 5000	>80
SEPODW 200-132-___	<b>200</b>	132	12600 / 14100 / 14400	3000 / 4000 / 5000	>80
SEPODW 300-198-___	<b>300</b>	198	18900 / 21150 / 21600	3000 / 4000 / 5000	>80
<b>5 Year warranty</b>	<b>Length [cm]</b>	<b>Power [W]</b>	<b>Luminous flux [lm]</b>	<b>Colour temperature [K]</b>	<b>CRI [Ra]</b>
SEPODW 100-39-___	<b>100</b>	39	3720 / 4170 / 4260	3000 / 4000 / 5000	>80
SEPODW 150-58.5-___	<b>150</b>	58,5	5580 / 6255 / 6390	3000 / 4000 / 5000	>80
SEPODW 200-78-___	<b>200</b>	78	7440 / 8340 / 8520	3000 / 4000 / 5000	>80
SEPODW 300-117-___	<b>300</b>	117	11160 / 12510 / 12780	3000 / 4000 / 5000	>80

# LAMP NAME- 100 - 13 - 3000- M - DALI

1

2

3

4

5

## 1. Length [cm]

50, 100, 150, 200, 300 cm  
special order - 10-300 cm

## 2. Power [W]

13 W/m  
22 W/m  
special order - others

## 3. Colour temperature [K]

3000 K - warm  
4000 K - neutral  
5000 K - cold  
special order - 2700K, 6000K

## 4. Cover

T - transparent  
M - milk/frosted

## 5. Control

Fibaro  
1-10 V  
Dali  
KNX