

# LIPOD DUO P + BOX




**NULAMP**



NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP

NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP NULAMP



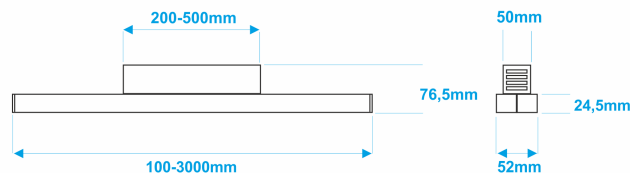

**Double, surface-mounted architectonic LED lamp with the power supply box.** Equivalent for double [LIPOD P lamp](#). Energy-efficient linear LED lighting, in the form of a double plafond, designed for surface mounting. Lamp construction enables easy connection to the surface of the box, where you can hide the power supply. It is possible to obtain a uniform light line and to purchase lamps of different lengths. Lamps to order with a wide range of applications, including use as office lamps or home lamps.

- Lamp: **double anodized aluminium** - grey, can be painted in any colour from the NCS scale.
- Optional transparent blend (glass efficiency 95%), or opal glass (glass transparency 70%): Makrolon®, of Bayer Polymers, **full certification**.
- Highest quality LED **OSRAM DURIS E5** diodes.
- Control: **Dali, 1-10V, KNX, Fibaro**.
- Luminaires design enables **easy maintenance and replacement of light sources**.
- Lamps with a light source were produced in the **European Union**.
- Possibility to **modify a set of lamps for specific customer expectations** (size, colour housing, light colour, type of light source: RGB, RGBW, active white) - [JDESIGN custom](#).

3 Year warranty	Length [cm]	Power [W]	Luminous flux [lm]	Colour temperature [K]	CRI [Ra]
LIPODDUOP+BOX 50-22-___	50	22	2100 / 2350 / 2400	3000 / 4000 / 5000	>80

LIPODDUOP+BOX 100-44-___	<b>100</b>	44	4200 / 4700 / 4800	3000 / 4000 / 5000	>80
LIPODDUOP+BOX 150-66-___	<b>150</b>	66	6300 / 7050 / 7200	3000 / 4000 / 5000	>80
LIPODDUOP+BOX 200-88-___	<b>200</b>	88	8400 / 9400 / 9600	3000 / 4000 / 5000	>80
<b>5 Year warranty</b>	<b>Length [cm]</b>	<b>Power [W]</b>	<b>Luminous flux [lm]</b>	<b>Colour temperature [K]</b>	<b>CRI [Ra]</b>
LIPODDUOP+BOX 50-13-___	<b>50</b>	13	1240 / 1390 / 1420	3000 / 4000 / 5000	>80
LIPODDUOP+BOX 100-26-___	<b>100</b>	26	2480 / 2780 / 2840	3000 / 4000 / 5000	>80
LIPODDUOP+BOX 150-39-___	<b>150</b>	39	3720 / 4170 / 4260	3000 / 4000 / 5000	>80
LIPODDUOP+BOX 200-52-___	<b>200</b>	52	4960 / 5560 / 5680	3000 / 4000 / 5000	>80
LIPODDUOP+BOX 300-78-___	<b>300</b>	78	7440 / 8340 / 8520	3000 / 4000 / 5000	>80

## LAMP NAME- 100 - 13 -3000- M -DALI

1

2

3

4

5

### 1. Length [cm]

50, 100, 150, 200, 300 cm  
special order - 10-300 cm

### 2. Power [W]

13 W/m  
22 W/m  
special order - others

### 3. Colour temperature [K]

3000 K - warm  
4000 K - neutral  
5000 K - cold  
special order - 2700K, 6000K

### 4. Cover

T - transparent  
M - milk/frosted

### 5. Control

Fibaro  
1-10 V  
Dali  
KNX